
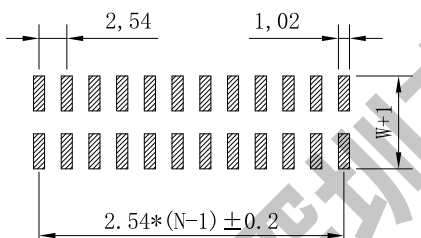

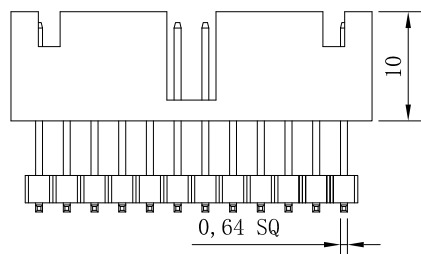


RoHS

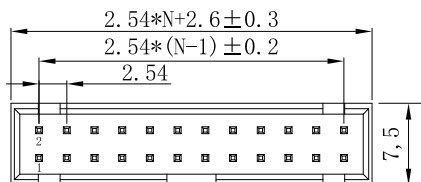

PCB LAYOUT

SPECIFICATIONS

Current Rating: 3 AMP
Insulator Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Withstanding Voltage: AC 500V
Operating Temperature: -40℃ to +105℃
Max Processing Temp: 230° -260° for 30-60 seconds
Insulator: Glass filled PA6T (UL94V-0), Black
Contacts: Brass

Ordering Information

A BO 254 100- 2 XX M C M XX X 01

127=1.27mm
200=2.0mm
254=2.54mm

排列 6-64P
2=2排
H高度
100=10.0mm

S=180度
R=90度
M=SMT
Z=卧贴

A=PBT
B=PA66
C=PA6T
D=PA9T
E=LCP

M=无柱
N=带柱

10=Gold flash
11=镀金1U
12=镀金1.5U
13=镀金2U
14=镀金3U
15=镀金5U
16=镀金10U
17=镀金15U
18=镀金30U
20=镀锡
21=半金锡1U
.....

P=袋装
H=盒装
T=管装
R=卷装

0=非标序号
1=塑胶层数

CNJWY®

深圳市金维益电子有限公司

ShenZhen CNJWY Electronic Co.,Ltd

>10	±0.30	SCALE: 比例:	1:1	APPD. 核准:			TITLE: 型号:	简牛护套BH-08
3~10	±0.20	UNIT: 单位:	mm	CHKD. 审核:			Part No: 料号:	AB0254XXX2XXMCNXXX01
0~3	±0.10	ANGLE	±1°	DR. 设计:	沈琼章	2023/07/28	Part No: 客户料号:	/