

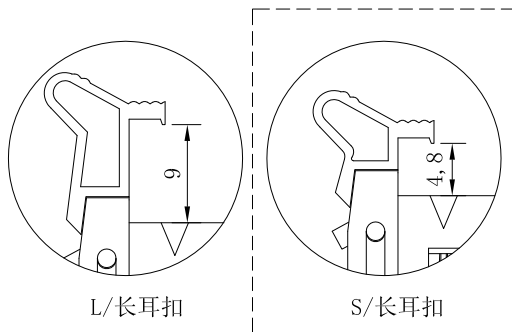
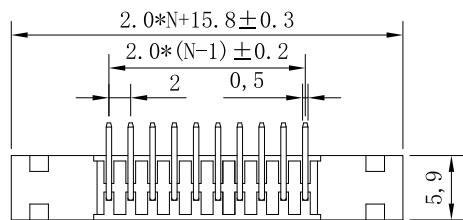


RoHS



SPECIFICATIONS


Current Rating: 3 AMP
 Insulator Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Withstanding Voltage: AC 500V
 Operating Temperature: -40°C to +105°C
 Max Processing Temp: 230° -260° for 30-60 seconds
 Insulator: Glass filled PA6T (UL94V-0), Black
 Contacts: Brass

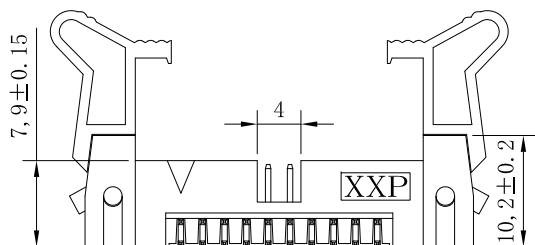

Ordering Information

A NJ 200- XX M C X XX X 01

127=1.27mm 6-64P S=180度 A=PBT L=长耳扣 10=镀金0.8U P=袋装
 200=2.0mm R=90度 B=PA66 M=中耳扣 11=镀金1U H=盒装
 254=2.54mm M=SMT C=PA6T S=短耳扣 12=镀金1.5U T=管装
 Z=卧贴 D=PA9T 13=镀金2U R=卷装
 E=LCP 14=镀金3U
 15=镀金5U
 16=镀金10U
 17=镀金15U
 18=镀金30U
 20=镀锡
 21=半金锡1U



PCB LAYOUT

CNJWY 深圳市金维益电子有限公司
 ShenZhen CNJWY Electronic Co.,Ltd

| | | | | | | | |
|------|-------|---------------|-----|--------------|----------------|-------------------|------------------|
| >10 | ±0.30 | SCALE: 比例: | 1:1 | APPD. 核准: | | TITLE: 型号: | 牛角EH-06 |
| 3~10 | ±0.20 | UNIT: 单位: | mm | CHKD. 审核: | | Part No: 料号: | ANJ200-XXRCXXX01 |
| 0~3 | ±0.10 | ANGLE | ±1° | DR. 设计: | 沈琼章 2023/07/28 | Part No: 客户料号: | / |