


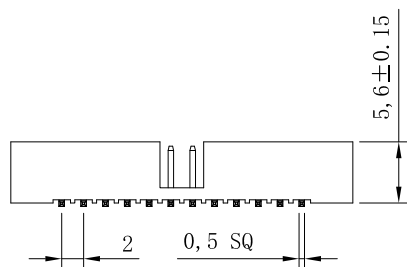


RoHS

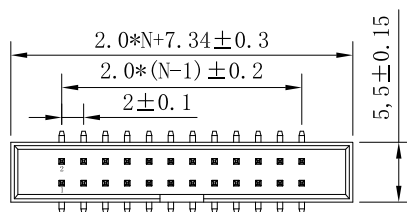

PCB LAYOUT

SPECIFICATIONS

Current Rating: 3 AMP
Insulator Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Withstanding Voltage: AC 500V
Operating Temperature: -40°C to +105°C
Max Processing Temp: 230° -260° for 30-60 seconds
Insulator: Glass filled PA6T (UL94V-0), Black
Contacts: Brass

Ordering Information

A	BO	200	100-	2	XX	M	C	M	XX	X	01
127=1.27mm	排列 6-64P	S=180度	A=PBT	M=无柱	10=Gold flash	P=袋装	0=非标序号				
200=2.0mm	2=2排	R=90度	B=PA66	N=带柱	11=镀金1U	H=盒装	1=塑胶层数				
254=2.54mm	H高度	M=SMT	C=PA6T		12=镀金1.5U	T=管装					
	100=10.0mm	Z=卧贴	D=PA9T		13=镀金2U	R=卷装					
			E=LCP		14=镀金3U						
					15=镀金5U						
					16=镀金10U						
					17=镀金15U						
					18=镀金30U						
					20=镀锡						
					21=半金锡1U						
											

CNJWY®

深圳市金维益电子有限公司

ShenZhen CNJWY Electronic Co.,Ltd

>10	±0.30	SCALE: 比例:	1:1	APPD. 核准:			TITLE: 型号:	简牛护套BH-02
3~10	±0.20	UNIT: 单位:	mm	CHKD. 审核:			Part No: 料号:	AB0200XXX2XXMCMXXX01
0~3	±0.10	ANGLE	±1°	DR. 设计:	沈琼章	2023/07/28	Part No: 客户料号:	/