

ROHS

SPECIFICATION

MATERIAL

Housing:PBT+30%G.F UL94V-0

Contacts:PhosPhor Bronze

ELECTRICAL




Current rating: 2 Amps .

Contact resistance: 20 mΩ initial

Insulation resistance: 1000 MΩ min @ 500 VDC

Dielectric withstanding voltage: 1000 VAC / minute

Operating temperature: -55° C TO +125° C

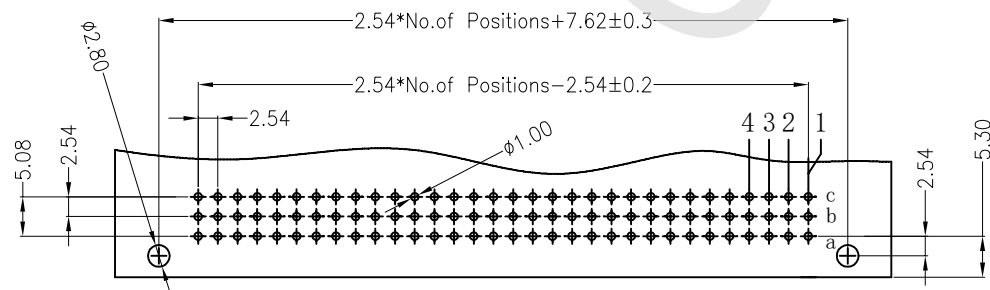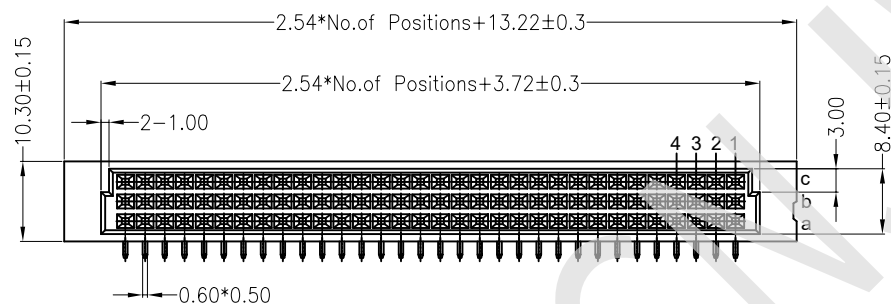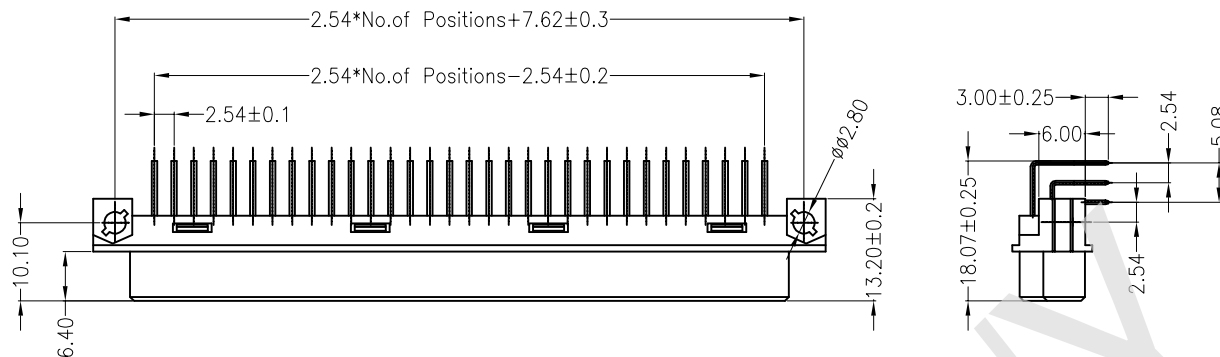

PCB LAYOUT(RECOMMENDED)

(TOP VIEW TOL. :±0.05)

Ordering Information

A OS 254 - F 3 XX R XX X 01				
200=2.0mm	30-96P	S=180度	10=Gold flash	P=袋装
254=2.54mm		R=90度	11=镀金1U	H=盒装
			12=镀金1.5U	T=管装
			13=镀金2U	R=卷装
			14=镀金3U	
			15=镀金5U	
			16=镀金10U	
			17=镀金15U	
			18=镀金30U	
			20=镀锡	
			21=半金锡1U	
				

CNJWY 深圳市金维益电子有限公司
ShenZhen CNJWY Electronic Co.,Ltd

>10	±0.30	SCALE: 比例:	1:1	APPD. 核准:			TITLE: 型号:	欧式插座 3XNP 弯母
3~10	±0.20	UNIT: 单位:	mm	CHKD. 审核:			Part No: 料号:	AOS254-F3XXRXXX01
0~3	±0.10	ANGLE	±1°	DR. 设计:	金承鑫	2021.04.16	Part No: 客户料号:	