

ROHS

SPECIFICATION

MATERIAL

Housing: PBT+30%G.F UL94V-0

Contacts: PhosPhor Bronze

ELECTRICAL




Current rating: 2 Amps .

Contact resistance: 20 mΩ initial

Insulation resistance: 1000 MΩ min @ 500 VDC


Dielectric withstanding voltage: 1000 VAC / minute

Operating temperature: -55° C TO +125° C

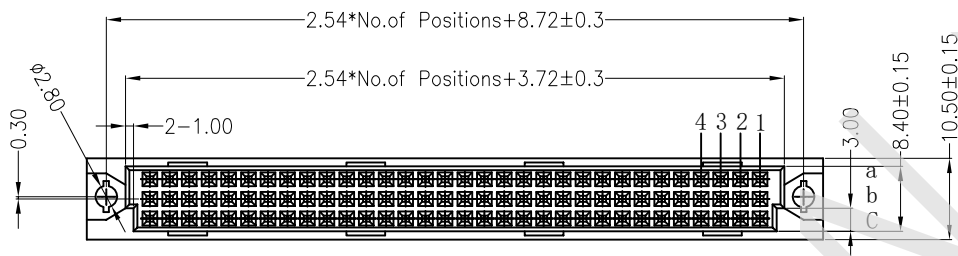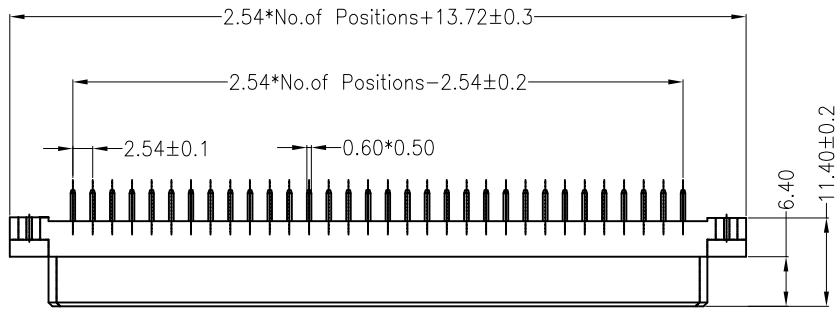

Ordering Information

A	OS	254	- F	3	XX	S	XX	X	01
200=2.0mm		254=2.54mm		30~96P	S=180度	R=90度	10=Gold flash		P=袋装
							11=镀金1U		H=盒装
							12=镀金1.5U		T=管装
							13=镀金2U		R=卷装
							14=镀金3U		
							15=镀金5U		
							16=镀金10U		
							17=镀金15U		
							18=镀金30U		
							20=镀锡		
							21=半金锡1U		
								

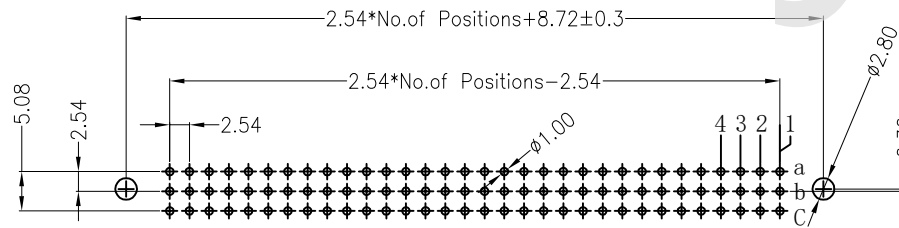

PCB LAYOUT(RECOMMENDED)
(TOP VIEW TOL. : ±0.05)

深圳市金维益电子有限公司
 ShenZhen CNJWY Electronic Co.,Ltd

>10	±0.30	SCALE: 比例:	1:1	APPD. 核准:		TITLE: 型号:	欧式插座 3XNP 直母
3~10	±0.20	UNIT: 单位:	mm	CHKD. 审核:		Part No: 料号:	A0S254-F3XXXSXXX01
0~3	±0.10	ANGLE	±1°	DR. 设计:	金承鑫 2021.04.16	Part No: 客户料号:	

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作