

# ROHS

## SPECIFICATION

### MATERIAL

Housing:PBT+30%G.F UL94V-0

Contacts:Brass

### ELECTRICAL





Current rating: 2 Amps .

Contact resistance: 20 mΩ initial

Insulation resistance: 1000 MΩ min @ 500 VDC

Dielectric withstanding voltage: 1000 VAC / minute

Operating temperature: -55° C TO +125° C

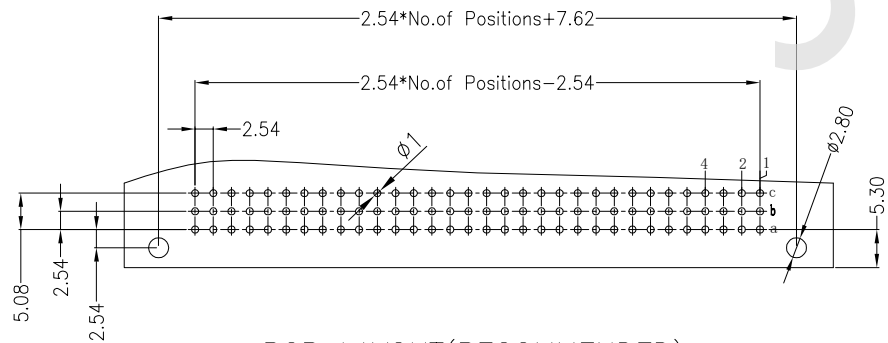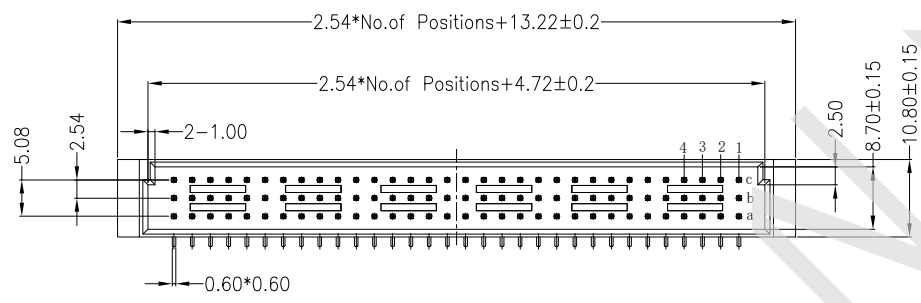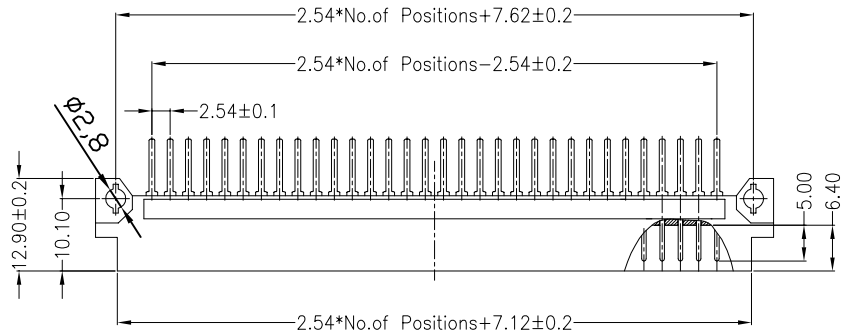

PCB LAYOUT(RECOMMENDED)  
(TOP VIEW TOL. :±0.05)

## Ordering Information

A OS 254 - M 3 XX R XX X 01			
200=2.0mm 254=2.54mm	30-96P S=180度 R=90度	10=Gold flash 11=镀金1U 12=镀金1.5U 13=镀金2U 14=镀金3U 15=镀金5U 16=镀金10U 17=镀金15U 18=镀金30U 20=镀锡 21=半金锡1U .....	P=袋装 H=盒装 T=管装 R=卷装

**深圳市金维益电子有限公司**  
 ShenZhen CNJWY Electronic Co.,Ltd

>10	±0.30	SCALE: 比例: 1:1	APPD. 核准:		TITLE: 型号:	欧式插座 3XNP 弯公
3~10	±0.20	UNIT: 单位: mm	CHKD. 审核:		Part No: 料号:	A0S254-M3XXRXX01
0~3	±0.10	ANGLE ±1°	DR. 设计:	金承鑫 2021.04.16	Part No: 客户料号:	

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作