

ROHS

SPECIFICATION

MATERIAL

Housing:PBT+30%G.F UL94V-0

Contacts:Brass

ELECTRICAL




Current rating: 2 Amps .

Contact resistance: 20 mΩ initial

Insulation resistance: 1000 MΩ min @ 500 VDC

Dielectric withstanding voltage: 1000 VAC / minute

Operating temperature: -55° C TO +125° C

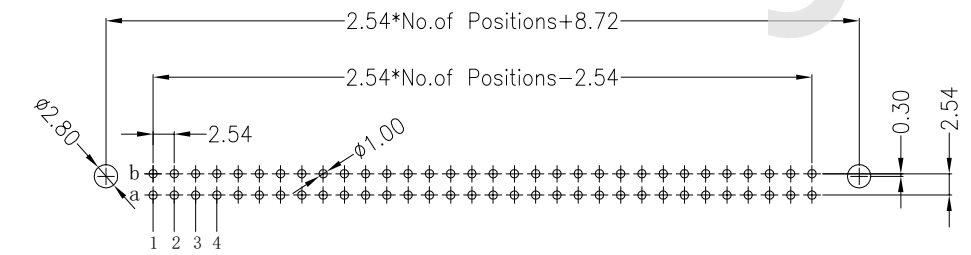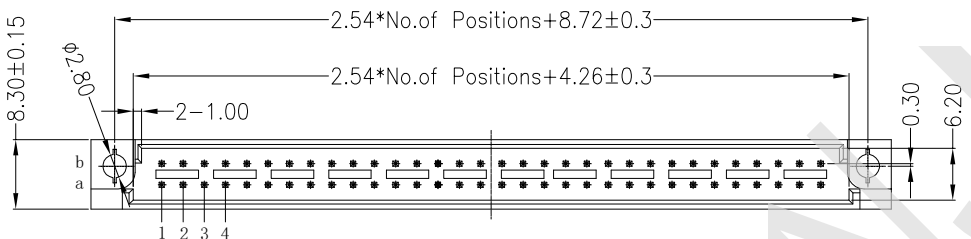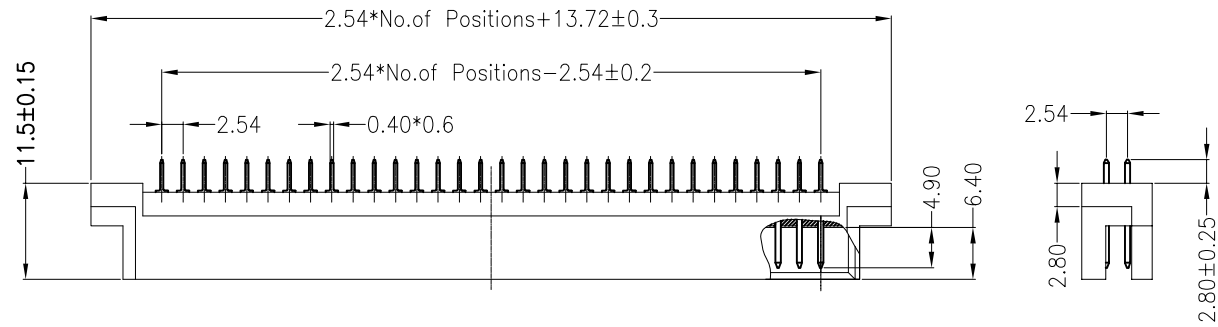

PCB LAYOUT(RECOMMENDED)
(TOP VIEW TOL. :±0.05)

Ordering Information

A	OS	254	-	M	2	XX	S	XX	X	01
200=2.0mm		254=2.54mm			10-64P	S=180度	R=90度	10=Gold flash		P=袋装
								11=镀金1U		H=盒装
								12=镀金1.5U		T=管装
								13=镀金2U		R=卷装
								14=镀金3U		
								15=镀金5U		
								16=镀金10U		
								17=镀金15U		
								18=镀金30U		
								20=镀锡		
								21=半金锡1U		
									

深圳市金维益电子有限公司 ShenZhen CNJWY Electronic Co.,Ltd									
>10	±0.30	SCALE: 比例:	1:1	APPD. 核准:			TITLE: 型号:	欧式插座 2XNP 直公	
3~10	±0.20	UNIT: 单位:	mm	CHKD. 审核:			Part No: 料号:	A0S254-M2XXSXXX01	
0~3	±0.10	ANGLE	±1°	DR. 设计:	金承鑫	2021.04.16	Part No: 客户料号:		

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作