

# ROHS

## SPECIFICATION

### MATERIAL

Housing: PBT+30%G.F UL94V-0

Contacts: PhosPhor Bronze

### ELECTRICAL





Current rating: 2 Amps .

Contact resistance: 20 mΩ initial

Insulation resistance: 1000 MΩ min @ 500 VDC

Dielectric withstanding voltage: 1000 VAC / minute

Operating temperature: -55° C TO +125° C

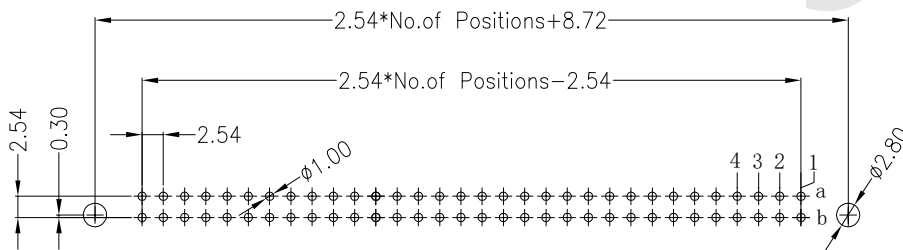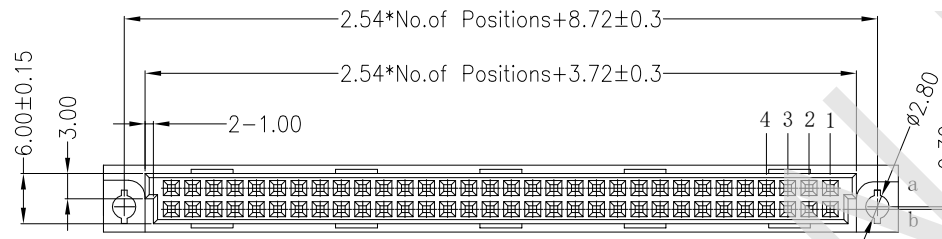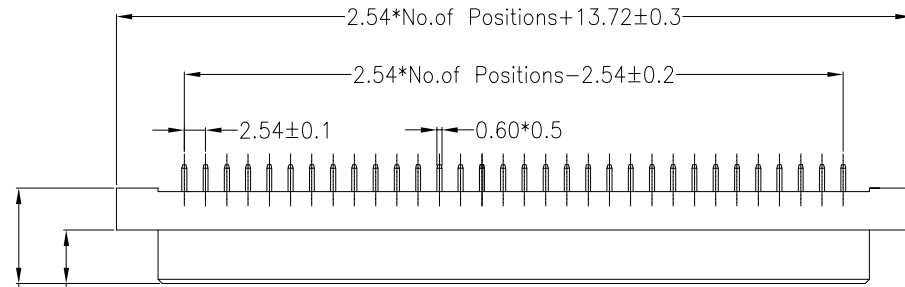

PCB LAYOUT (RECOMMENDED)  
(TOP VIEW TOL. : ±0.05)

## Ordering Information

A OS 254 - F 2 XX S XX X 01

200=2.0mm  
254=2.54mm

10-64P S=180度  
R=90度

10=Gold flash  
11=镀金1U  
12=镀金1.5U  
13=镀金2U  
14=镀金3U  
15=镀金5U  
16=镀金10U  
17=镀金15U  
18=镀金30U  
20=镀锡  
21=半金锡1U  
.....

P=袋装  
H=盒装  
T=管装  
R=卷装

**CNJWY** 深圳市金维益电子有限公司  
ShenZhen CNJWY Electronic Co.,Ltd

>10	±0.30	SCALE: 比例:	1:1	APPD. 核准:		TITLE: 型号:	欧式插座 2XNP 直母
3~10	±0.20	UNIT: 单位:	mm	CHKD. 审核:		Part No: 料号:	A0S254-F2XXSXXX01
0~3	±0.10	ANGLE	±1°	DR. 设计:	金承鑫 2021.04.16	Part No: 客户料号:	