
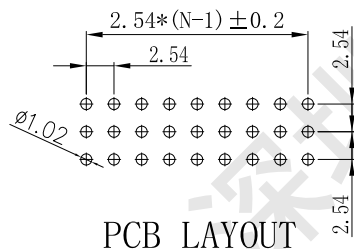
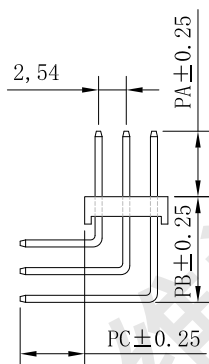



RoHS

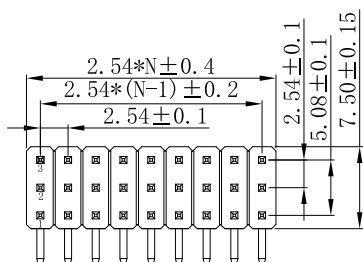

SPECIFICATIONS

Current Rating: 3 AMP
 Insulator Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Withstanding Voltage: AC 500V
 Operating Temperature: -40°C to +105°C
 Max Processing Temp: 230° -260° for 30-60 seconds
 Insulator: Glass filled PA6T (UL94V-0), Black
 Contacts: Brass

Ordering Information

A PH 254 25-1 3 XX S C M XX 115 X 01

- 080=0.8mm
- 100=1.0mm
- 127=1.27mm
- 200=2.0mm
- 254=2.54mm
- 1-40P S=180度
- R=90度
- M=SMT
- Z=卧贴
- A=PBT
- B=PA66
- C=PA6T
- D=PA9T
- E=LCP
- M=无柱
- N=带柱
- 10=Gold flash
- 11=镀金1U
- 12=镀金1.5U
- 13=镀金2U
- 14=镀金3U
- 15=镀金5U
- 16=镀金10U
- 17=镀金15U
- 18=镀金30U
- 20=镀锡
- 21=半金锡1U
-
- 针长
- 115=11.5mm
- P=袋装
- H=盒装
- T=管装
- R=卷装

CNJWY 深圳市金维益电子有限公司
 ShenZhen CNJWY Electronic Co.,Ltd

>10	±0.30	SCALE: 比例:	1:1	APPD. 核准:		TITLE: 型号:	排针ST-08
3~10	±0.20	UNIT: 单位:	mm	CHKD. 审核:		Part No: 料号:	APH25425-1309RCMXXXXXX01
0~3	±0.10	ANGLE	±1°	DR. 设计:	沈琼章 2023/08/05	Part No: 客户料号:	/