

ROHS

# SPECIFICATIONS

Current Rating: 3 AMP  
 Insulator Resistance: 1000MΩ Min.  
 Contact Resistance: 20mΩ Max.  
 Withstanding Voltage: AC 500V  
 Operating Temperature: -40°C to +105°C  
 Max Processing Temp: 230° -260° for 30-60 seconds  
 Insulator: Glass filled PA6T (UL94V-0), Black  
 Contacts: Brass

## Ordering Information

A PH 254 25-1 2 XX S C M XX 170 X 01

080=0.8mm  
 100=1.0mm  
 127=1.27mm  
 200=2.0mm  
 254=2.54mm





1-40P  
 S=180度  
 R=90度  
 M=SMT  
 Z=卧贴

A=PBT  
 B=PA66  
 C=PA6T  
 D=PA9T  
 E=LCP

M=无柱  
 N=带柱

10=Gold flash 170=17.0mm  
 11=镀金1U  
 12=镀金1.5U  
 13=镀金2U  
 14=镀金3U  
 15=镀金5U  
 16=镀金10U  
 17=镀金15U  
 18=镀金30U  
 20=镀锡  
 21=半金锡1U  
 .....

P=袋装  
 H=盒装  
 T=管装  
 R=卷装

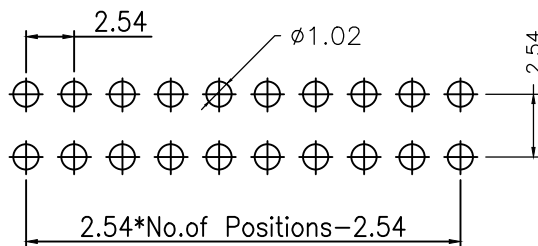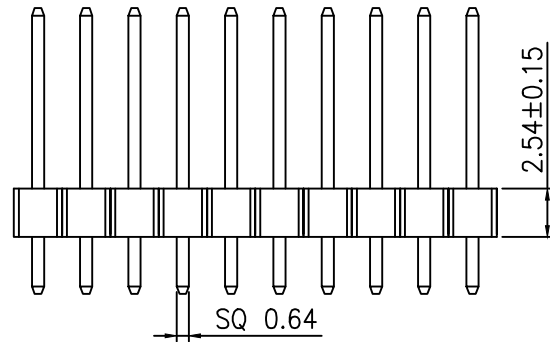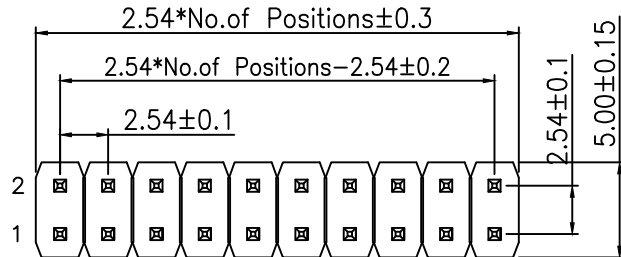

PCB LAYOUT

备注: X 尺寸可以依照客户需求定制

Dimension antitheses list			
ITEM	PA	PC	L
Alternate	X	X	

**CNJWY** 深圳市金维益电子有限公司  
 ShenZhen CNJWY Electronic Co.,Ltd

>10	±0.30	SCALE: 比例:	1:1	APPD. 核准:		TITLE: 型号:	排针 2.54X2.5 2XNP 180度 L11.5PA6.0 PC3.0 6T料
3~10	±0.20	UNIT: 单位:	mm	CHKD. 审核:		Part No: 料号:	APH25425-12XXSCMXX115X01
0~3	±0.10	ANGLE	±1°	DR. 设计:	MAX	2021.04.16	Part No: 客户料号: